

NANO WASH MATT EXTERIOR PAINT



Application Recommendations

Application Areas

- In interior; prepared in accordance mortar, concrete, cement board, gypsum panel surfaces such as

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Nano Wash Exterior Undercoat



Nano Clean Mat Exterior Paint

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket




Sprayer


Surface Preparation



Mortar



Concrete



Cement Board




Gypsum Panels




Old Plastic Paint

- Nano Wash Matt Exterior Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Nano Wash Matt Exterior Paint, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Best way to take advantage from Nano Wash Matt Exterior Paint after making all surfaces smooth to apply. Nano Wash Exterior Undercoat will reduce consumption and ensure good adhesion.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

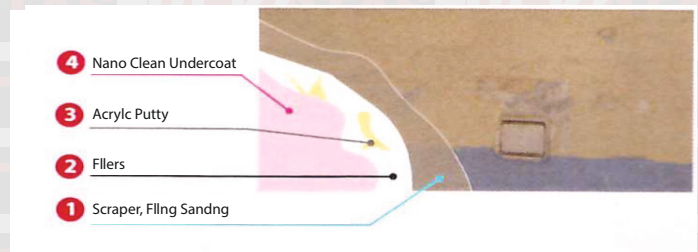

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 °C.



Before application Nano Wash Matt Exterior Paint should be mixed.



Nano Wash Matt Exterior Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

NANO WASH MATT EXTERIOR PAINT



Exterior

Water

Product Code 20

Product Description

- It is decorative exterior paint, acrylic emulsion based, photocatalytic (self-cleaning with light) resistant to mildew and algae.

Application Areas

- In interior surfaces, such as mortar, concrete, cement, boards, gypsum panel.
- Old painted surfaces.

Advantages

- Thanks to light-activated photocatalyst in also destroy the harmful substance and odors. Thus, cleans walls and keep walls clean for a long time.
- Showing resistance to mold and fungus; provides relief especially for asthmatics.
- Indelible and easily cleaned.
- It has superior cover power.
- Repels water due to contain silicone, hitting the facade of rainwater, allows to slide away without wetting the surface.
- High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- Not affected severe weather conditions like rain, snow, humidity and such as extreme cold or hot.
- Resistant for alkali.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistolet

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Smooth

Color

- White

Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): approximately: 150

Drying Time

- (between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossification time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 8-10 m²/lt. per a layer.

Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 20 - 10 and 3,5kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 7848
Public exposure No. 04.524/604.506/E3

