

GOLD

Textured Grained Elastic Rulocoat



Application Recommendations

Application Areas

- All facade of buildings, mortar, concrete and cement surfaces, inner surface with undercoat for decorative purposes.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Gold Rulocoat

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer


Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile




Wallpaper

- Application surfaces must be removed from all kind of dirt, oil, dust and completely cleaned old and blistered paint. Should be made dry, clean and solid.

- Is applied by Rulocoat roller.

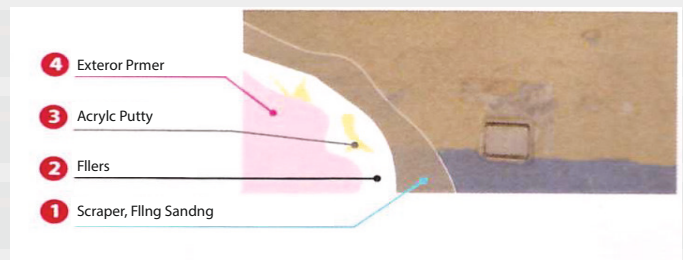

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Textured Grain Elastic Rulocoat should be mixed.



Gold Textured Grain Elastic Rulocoat thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD TEXTURED GRAINED ELASTIC RULOCOAT



Exterior

Water

Product Code: 195

Product Description

- It is acrylic emulsion, elastomeric and long-lived decorative exterior coating.

Application Areas

- All facade of buildings, mortar, concrete and cement surfaces can be used inner surface with undercoat for decorative purposes.

Advantages

- High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- Not affected severe weather conditions like rain, snow, humidity and such as extreme cold or hot.
- It has superior cover power.
- Is resistant to alkaline.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistle

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Rough

Color

- In stock white. Custom manufacturing for any orders.

Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): Approximately: 150

Drying Time

- (between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- Depending on the surface smoothness, absorbency, crack depth and pattern size approximately 1,5 - 2 m²/lt.

Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 20 kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.



Quality Certificate

- TS 7847
Public exposure No. 04.524/604.506/E3