

GOLD GLAZE



Exterior

Interior

Solvent

Application Recommendations

Application Areas

- Can be used safely. It is use requiring strenght interior wood flooring, stairs and flooring surfaces.

Equipment



Gold Glaze

Equipment



Scraper

Gypsumtrowel

Puttyshovel

Spatula

Trowel

Dust Cloth

Brush

Mixer


Adjustable
Stick

Paint Bucket

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile



Wallpaper

- The application surfaces are free from any contamination and should be sufficient dryness.
- Application surface previously varnished surface is cleaned with a scraper and parquet sanding sealer is applied.
- If necesery Gold Glaze apply 2 or 3 times on resulting smooth surface.
- Application tools should be cleaned immediatly after use with synthetic thinner.
- bTemperature should be between 5 ° C-30 ° C during application.

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Glaze should be mixed.



Gold Glaze thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediatly.

GOLD GLAZE

BEKOTAŞ
Boya

Exterior

Interior

Solvent

Product Code: 315

Product Description


- ◆ Single component, urethane modified alkyd-based, lead-free parquet lacquer.

Application Areas

- ◆ Can be used safely. Its use requiring strength interior wood flooring, stairs and flooring surfaces.

Advantages

- ◆ Has high brightness and floor shine
- ◆ Transparent color.
- ◆ It does not contain lead.
- ◆ Does not cover natural appearance of apply.

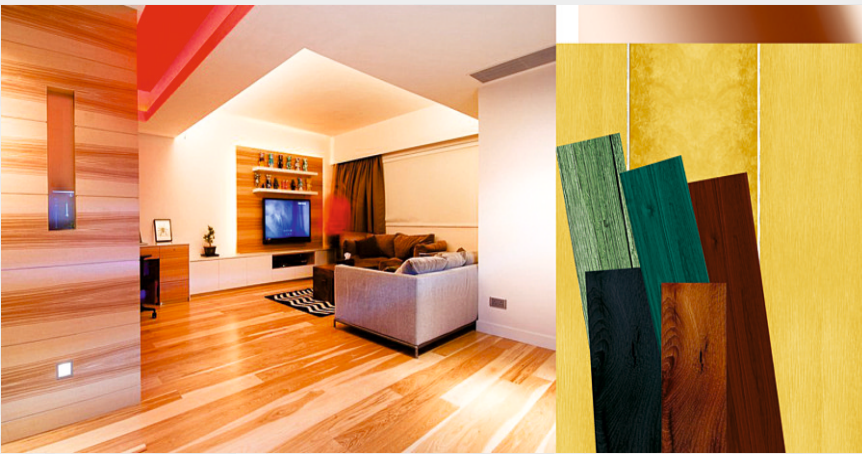

Bright



Brush



Roll



Spray Pistle

Technical specifications:

Structure

- ◆ Alkyd resin based, Solvent based

Diluting

- ◆ Solvent

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Bright, Smooth.

Color

- ◆ Transparent and any colour in colour chart

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): Approximately: 80

Drying Time

- ◆ (between +5 +35 °C) Touching time: 3 hours Doesn't hold dust for 8 hours. Complete drying time: 24 hours. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 10-12 m²/lt.

Shelf Life

- ◆ In package and in 5-35 °C 2 years


Packing

- ◆ 12 kg tin bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- ◆  TS 5808
Public exposure No. 04.524/604.506/E3

