

GOLD ACRYLIC Curb Paint



Application Recommendations

Application Areas

- Used for road marking.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Gold Acrylic Curb Paint

Equipment



Scraper



Gypsum trowel



Putty shovel




Spatula



Trowel



Dust Cloth



Brush



Mixer




Adjustable Stick



Paint Bucket

Surface Preparation




Concrete




Curb

- Gold Acrylic Curb Paint use on the surface cleaned from dirt and swollen layer.

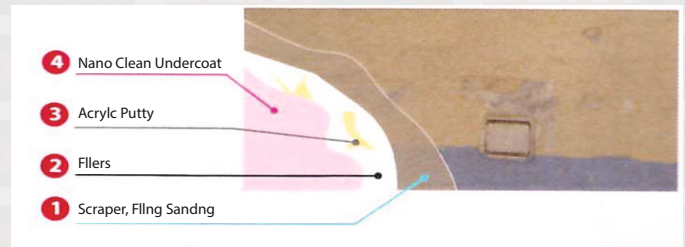

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Acrylic Curb Paint should be mixed.



Gold Acrylic Curb Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD ACRYLIC Curb Paint



Exterior

Water

Product Code: 170

Product Description

- ◆ It is acrylic curb paint with silicone; acrylic emulsion based and resistant to mildew and algae.

Application Areas

- ◆ Used for road marking.

Advantages

- ◆ Showing resistance to mold and fungus; provides relief especially for asthmatics.
- ◆ It has superior cover power.
- ◆ Because of contain silicone pushes the water rain and to slide away without wetting the surface of the rain water hitting the front.
- ◆ With high water vapor permeability allows the building to breathe thrown out of steam.
- ◆ Not affected rain, snow, humidity, by severe weather conditions such as extreme cold or hot; not swell, crack and fade colors.
- ◆ Resistant to alkaline
- ◆ Does not harm health of environment and no smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistle

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Matt, Pastel, Smooth

Color

- ◆ In stock white. Custom manufacturing for any orders.

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately: 150

Drying Time

- ◆ (between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossification time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 8-10 m²/lt. per a layer.

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 20 kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3

